


ASSEMBLY INSTRUCTIONS

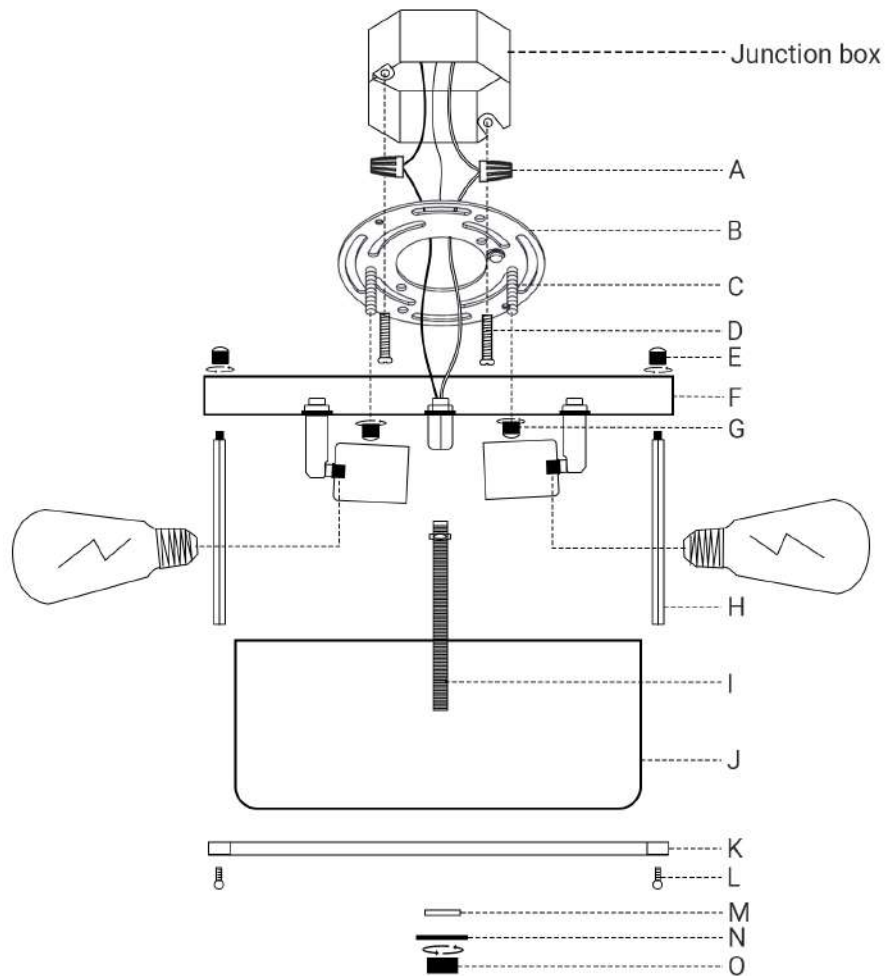

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING: SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (B) from the canopy (F) by unscrewing the ball nuts (G).
3. Install 4 metal rods (H) to the canopy (F) and secure with cap nuts (E).
4. Install the metal ring (K) to the metal rods (H) and secure with ball nuts (L).
5. Install the mounting plate (B) to the junction box and secure with the mounting screws (D).
6. Connect the safety cables as shown in diagram.
7. Wrap the fixture ground wire to the green ground screw on the mounting plate (B) and secure, then connect to the ground wire in the junction box using the wire nut (A).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

8. Connect the fixture white wire to the neutral wire in the junction box using the wire nut (A).
9. Connect the fixture black wire to the hot wire in the junction box using the wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.

10. Install the canopy (F) to the mounting plate (B) and secure with the cap nuts (G).
11. Install the center pipe (I) to the canopy (F).
12. Insert bulbs (not included) into the sockets.
13. Install the glass lampshade (J) to the fixture body and secure with the plastic washer (M), the metal washer (N) and the finial (O).

DO NOT OVER-TIGHTEN, OTHERWISE GLASS COULD BECOME DAMAGED.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.